



ISM-BLP1 Blue Line PIR Detector



- ▶ **11 m x 11 m (35 ft x 35 ft) broad coverage**
- ▶ **EN50131-2-2 Grade 2 compliant**
- ▶ **First Step Processing (FSP)**
- ▶ **Flexible mounting height from 2.3 m to 2.7 m (7.5 ft to 9 ft)**
- ▶ **No range or height adjustments required**
- ▶ **Installation-friendly two-piece design**
- ▶ **Easy wiring access with plug-in terminals**
- ▶ **Draft and insect immunity**
- ▶ **Eight detection layers including optional look-down zone**
- ▶ **Temperature compensation**

The ISM-BLP1 Detector uses a high-density (77 zone) Fresnel lens designed to produce sharply-focused images throughout the field of view providing superior response to intruders. Easy installation and flexible mounting options provide state-of-the-art detection.

Functions

Signal Processing

First Step Processing (FSP) almost instantly responds to human targets without producing false alarms from other sources. FSP adjusts the detector's sensitivity based on signal amplitude, polarity, slope, and timing. This eliminates the need for the installer to select the sensitivity level.

Test Features

The externally-visible alarm LED can be disabled after installation.

Draft and Insect Immunity

The sealed optical chamber prevents drafts and insects from affecting the detector.

Temperature Compensation

The detector adjusts its sensitivity so that it can identify human intruders at critical temperatures.

Certifications and Approvals

Region	Certification	
Europe	CE	89/336/EEC, EN55022:1998 +A1:2000 +A2:2003 (ANSI C63.4:2001), EN50130-4:1996 +A1:1998 +A2:2003, EN61000-3-3:1995 +A1:2001, EN61000-4-2:1995 +A1:1998 +A2:2001, EN61000-4-3:2002 +A1:2002, EN61000-4-4:1995 +A1:2000 +A2:2001, EN61000-4-5:1995 +A1:2001, EN61000-4-6:1996 +A1:2001, EN61000-4-11:1994 +A1:2001, EN300440:1996, TS 50131-2-2:2004 (Version 1)
	EN50131	EN 50131-1, TS 50131-2-2 August 2004, EN 50130-4, EN 50130-5
Belgium	INCERT	B-509-0009/a
Russia	GOST	IEC 60839-1-3-2001, IEC 60839-2-2-2001, IEC 60839-2-6-2001, GOST 26342-84, GOST 27990-88
		GOST 12997-84, GOST R 50009-2000, GOST R 51317.3.2-99, GOST R 51317.3.3-99, GOST R MEK 60065-2002

Region	Certification	
USA	UL	ANSR: Intrusion Detection Units (UL639), ANSR7: Intrusion Detection Units Certified for Canada (cULus)
Italy	IMQ	
France	AFNOR	NF, A2P (262262-00)
Sweden	INTYG	05-132
Australia	C-tick	
Ukraine		IEC 60839-1-3-2001, IEC 60839-2-2-2001, IEC 60839-2-6-2001, GOST 26342-84, GOST 27990-88
Europe	Complies with EN50131-2-2 Grade 2	

- On a flat wall (surface, semi-flush) with the optional B335 Swivel-mount Bracket, or with the optional B328 Gimbal-mount Bracket,
- In the junction of two perpendicular walls, or
- On the ceiling with the optional B338 Ceiling-mount Bracket.

Note The use of optional mounting brackets can reduce the detector's range and increase the dead zone areas.

Power Considerations

Power Limits


Input power must be provided by an Approved Limited Power Source. All outputs must be connected to SELV (safety extra-low voltage) circuits only.

Standby Power

This detector has no internal standby battery. *For UL Listed product installations, 4 hr (40 mAh) of standby power must be supplied by the control unit or by a UL Listed burglary power supply.*


Installation/Configuration Notes

Coverage Patterns

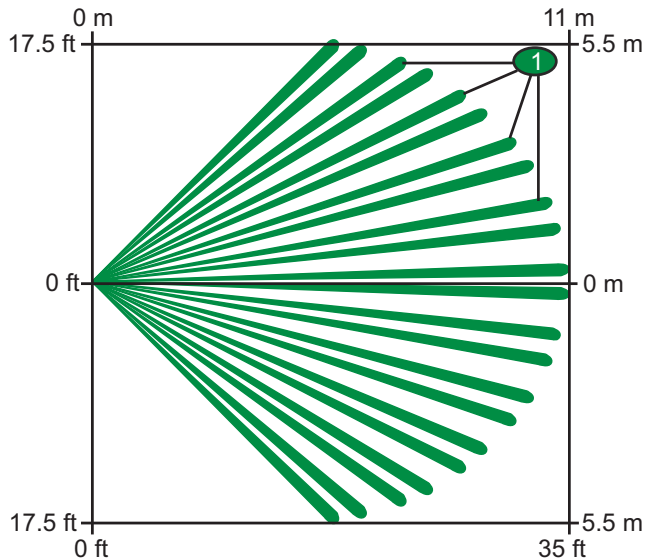

Top View Broad: 11 m x 11 m (35 ft x 35 ft)

1 PIR coverage pattern

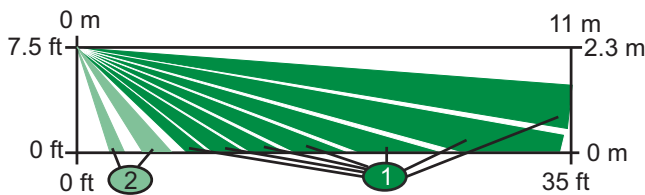

Side View Broad: 11 m x 11 m (35 ft x 35 ft)

1 PIR coverage pattern 2 Two look-down zones

Mounting

The recommended mounting height is 2.3 m to 2.7 m (7.5 ft to 9 ft).

The detector can be mounted:

Parts Included

Quant.	Component
1	Detector
1	Hardware pack
1	Literature pack

Technical Specifications

Environmental Considerations

Designed to comply with EN50131-2-2 Environmental Class II, Security Grade 2

Relative Humidity:	0 to 85%, non-condensing
Temperature (operating):	-29°C to +49°C (-20°F to +120°F) <i>For UL Listed product installations, 0°C to +49°C (+32°F to +120°F)</i>

Mechanical Properties

Color:	White
Dimensions:	10.7 cm x 6.1 cm x 4.8 cm (4.2 in. x 2.4 in. x 1.9 in.)
Material:	High-impact ABS plastic
Radio Frequency Interference (RFI) Immunity	No alarm or setup on critical frequencies in the range from 26 MHz to 950 MHz at field strengths less than 50 V/m.

Outputs

Digital Alarm:	5 V normally, grounded for 4 sec during alarm.
Relay:	Solid state, supervised, Form A normally-closed (NC) contacts rated for 125 mA, 28 VDC, 3 W.
Tamper:	Normally-closed (NC) contacts (with cover on) rated at 28 VDC, 125 mA maximum. Connect tamper circuit to 24-hour protection circuit.

Power Requirements

Current (Alarm):	18 mA
Current (Standby):	10 mA maximum at 12 VDC
Voltage (Operating):	10 VDC to 14 VDC

Ordering Information

ISM-BLP1 Blue Line PIR Detector	ISM-BLP1
Produces sharply-focused images throughout the field of view providing superior response to intruders	
Accessories	
ISM-BLA1-CC Blue Line Color Camera Module (NTSC format)	ISM-BLA1-CC-N
NTSC format	
ISM-BLA1-CC Blue Line Color Camera Module (PAL format)	ISM-BLA1-CC-P
PAL format	
ISM-BLA1-LM Blue Line Nightlight Module	ISM-BLA1-LM
Fits all Blue Line detectors	
ISM-BLA1-SM Blue Line Sounder Module	ISM-BLA1-SM
Fits all Blue Line detectors	
B328 Gimbal-mount Bracket	B328
Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.	
Swiveling B335-3 low-profile mount	B335-3
Swiveling, low-profile, plastic mount for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°. Available in triple packs.	
B338 universal ceiling mount	B338
Swiveling plastic mount for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.	

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
38C Jalan Pemimpin
Singapore 577180
Phone: +65 6319 3453
Fax: +65 6319 3499
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by