



PAC1 SERIES 3

NP-PAC1

Single Door Access Controller

FEATURES

- 12-24 Volt D.C. or 16-24 Volt A.C. operation.
- 600 Users.
- Controls a single door.
- Split system ensures maximum security.
- Support for bulk entry of users.
- Heavy duty 5 Amp relay contacts for lock control.
- Support for Fail Safe and Fail Secure locking schemes.
- 1 Amp N.O. relay contacts for DOTL and Door Forced alarm outputs.
- Automatic door Re-lock function.
- Programmable EGRESS input:
 - Momentary release for door output.
 - Hold release for door output.
- Backward compatibility feature for use with the PACDL Datalogger.
- 10 year data memory retention, non-volatile memory.
- 36 month manufacturer's warranty.

SPECIFICATIONS

Dimensions:

104mm x 72mm x 27mm

Operating Voltage:

11 - 30 Volts D.C.
14 - 28 Volts A.C.

Operating Current:

200 mA. D.C. max
240 mA. A.C. max

Operating Temperature:

0°C to 70°C

ELC Contacts:

30 Volts, 5 Amp A.C./D.C.
Single Pole Single Throw
Programmable: N.O. or N.C.

DOTL Contacts:

30 Volts, 1 Amp, N.O.
Single Pole Single Throw

Weight:


150g



NIDAC Security

2 Cromwell Street
BURWOOD VICTORIA
AUSTRALIA 3125

Phone: +61 3 9808 6244
Fax: +61 3 9808 9335
E-mail: sales@nidac.com
Web: www.nidac.com

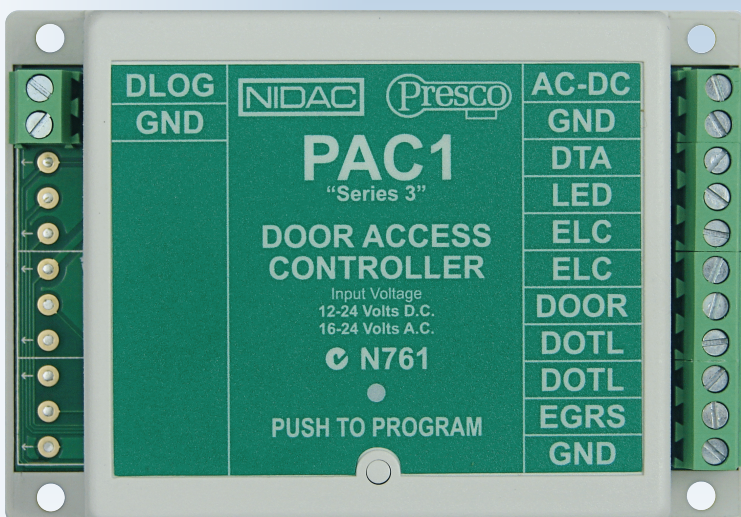

Distributed by: